


LAN relay

Nano Relay **OUTPUT** PoE

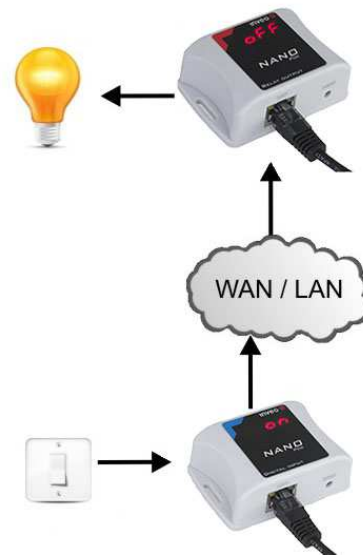

Characteristic

- LAN / RJ45 communication
- Supported protocols: HTTP GET, Modbus TCP, SNMP, MQTT
- Built-in www server
- Clear LED display showing output status
- Output status available remotely
- Software update via LAN
- M2M connection option - remote extension





Technical data

Supply voltage	POE IEEE 802.3af, 10-24VDC (screw connection)
Power consumption	max: 1.5W
Display	7-segment LED, red
Housing	IP30
Operating environment	-10°C to + 55°C
Dimensions	27 (H) x 74,6 (W) x 50,1(D) mm
Weight	64,5g
Communication	
1 Ethernet port	up to 10Mbps PoE IEEE802.3af
Outputs	
1 relay output	NO output (normally open) max load 1A 30VDC voltage on time: 10 ms off time: 5ms

We also recommend:

Nano Temperature Sensor PoE temperature control module via LAN



Nano Digital Input PoE digital input control module via LAN



Nano Relay Output PoE
entirely designed and made by
a Polish company

inveo



www.inveo.com.pl
info@inveo.com.pl



+48 785 55 22 52
+48 33 444 65 87



Poland
43-340 Kozy
ul. Rzemieślnicza 21



INVEO - Innovative, Necessary, Visionary,
Economic, Optimum