


LANTICK

16-0, 0-16

Applications:

- Monitoring the state of a digital input via LAN (PE-0-16)
- Remote relay output control (PE-16-0)
- Integration with building management, monitoring and alarm systems
- Remote system diagnostics

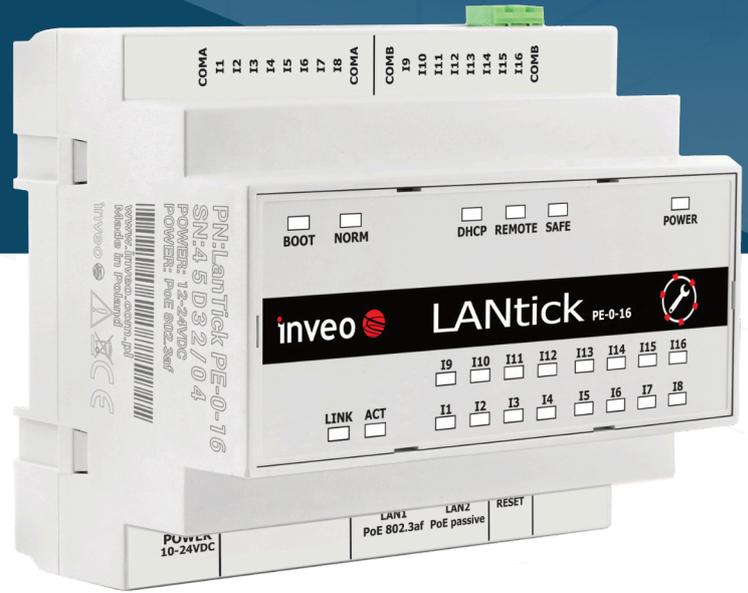

Characteristics:



- Robust construction for reliability and durability of the device.
- Easy to use user interface.
- Built-in www server for remote device management and configuration via a web browser.
- HTTP, Modbus TCP, SNMP, TCP/UDP, KNX/IP, Inveo Dashboard communication protocols support.
- Expandable and scalable as the system grows.

Technical characteristics

Power supply	PoE: 33-57V IEEE 802.3af	Passive PoE 10-24V DC	DC: 10-24V, 3,5mm screw terminal
Power consumption	1 - 2W		
Outputs (Lantick PE-16-0)	Output type: solid-state	Output voltage: 5-28V	Maximum channel load: 1,7A
Inputs (Lantick PE-0-16)	Input type: galvanically insulated, pre-polarized, NO/voltage		Input voltage: 10-24V
Communication	Ethernet 10Mbps, RJ45 port	Built-in network switch for connecting subsequent devices	
Enclosure	IP rating: IP30	Dimensions: 90 x 104,8 x 65mm	
Operating temperature	From -10°C to +55°C		

Version	Inputs	Outputs	Catalogue number
LanTick PE-16-0	-	16	LN-0100-0052-00
LanTick PE-0-16	16	-	LN-0002-2043-00